


Addendum to Conergy PX Installation Manual

To Whom It May Concern,

we, Conergy AG, Anckelmannsplatz 1, 20537 Hamburg, herewith confirm that in addition to the currently valid Installation Manuals for Conergy PX 60cell and 72cell polycrystalline modules the following addendum is valid:


- | Short side clamping is possible with a maximum snow load capacity of 2,400Pa within the clamping range A given the distance B from the module corner as specified below.
- | Long side clamping is possible with a maximum snow load capacity of 2,400Pa within the clamping range C given the distance D from the module corner as specified below.

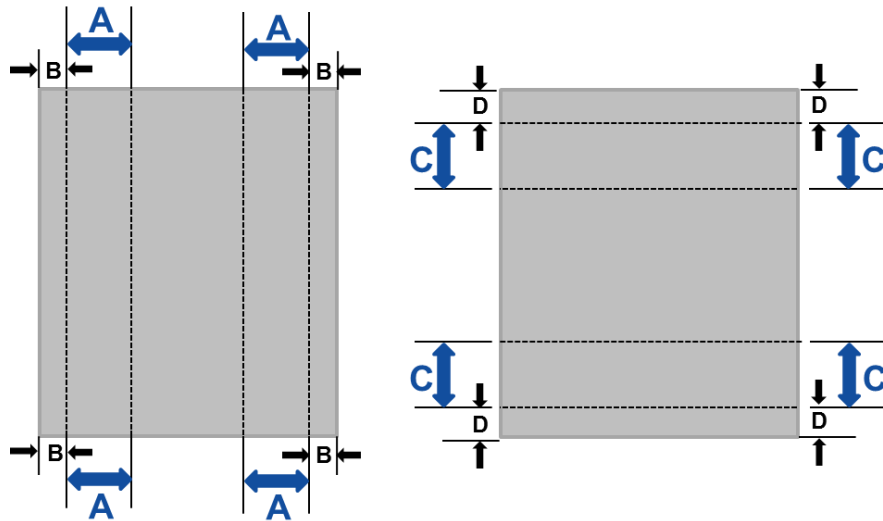

	Clamping range A (short side)	Distance to corner B (short side)	Clamping range C (long side)	Distance to corner D (long side)
60cell	190 mm	50 mm	380 mm	100 mm
72cell	190 mm	50 mm	460 mm	100 mm

Addendum to Conergy PX Installation Manual

- | The modules are only able to withstand 5,400Pa snow load if either all eight mounting holes are used, or if at least 6 clamps are used:
- four of them in the above mentioned clamping ranges (C) on the long sides
 - and additionally at least two for support: minimum one in each shaded area between the clamping ranges (C)

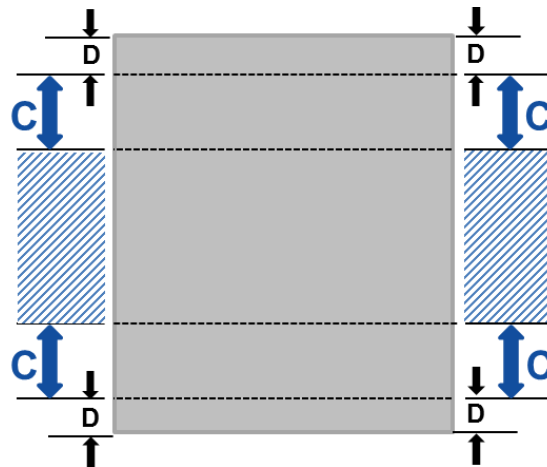

Hamburg, January 2nd, 2013